

CAT. No. 57090		IEC 60320 C-19 CONNECTOR, 21 AMPERE 250 VOLT (UL/CSA), 16 AMPERE 250 VOLT (VDE), IMPACT RESISTANT NYLON, 2 POLE-3 WIRE GROUNDING (2P+E), TERMINALS ACCEPT 14 AWG (2.1mm) OR 12 AWG (4.0 mm) CONDUCTORS, 8 mm (0.315") TO 10 mm (0.394") DIA. CORDAGE. BLACK.	
APPROVALS	C(UL)US ☒ ENEC 10 ☒ VDE ☒ CCC ☒		
CERTIFICATIONS	REACH ☒ ROHS ☒ ROHS2 (2011/65/EU) ☒ ROHS3 (2015/863, 2017/2012) ☒ CHINA ROHS ☒ CE ☒		
STANDARDS	IEC 60320 C-19 ☒ IEC 60320-1 ☒ UL 60320-1 ☒ CSA C22.2 No 60320-1 ☒		

DESCRIPTION:

CORD CONNECTOR: SCREW-ON MOUNTING
CONNECTOR, PIN TEMPERATURE 70°C, PROTECTION CLASS I

TECHNICAL DATA:



RATINGS IEC 16A/250VAC; 50HZ
RATINGS UL/CSA 20A/250VAC; 60HZ
DIELECTRIC STRENGTH: >2KVAC BETWEEN L-N
>2KVAC BETWEEN L/N-PE (1MIN/50HZ)
ALLOWABLE OPERATION TEMP: -25°C TO +70°C
DEGREE OF PROTECTION: FROM FRONT SIDE IP20 ACC. TO IEC 60529
PROTECTION CLASS: SUITABLE FOR APPLIANCES WITH PROTECTION CLASS I ACC TO IEC 61140
MATERIAL, HOUSING: THERMOPLASTIC, BLACK, UL 94V-0

ALL DIMENSIONS ARE IN MILLIMETERS


MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 10 DIA (0.394")
MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 10 DIA (0.394")
MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 4.0 (12 AWG)

CORDAGE PREPARATION

CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN/YELLOW	GROUND	16	6
BLUE	NEUTRAL	26	6
BROWN	LINE	26	6

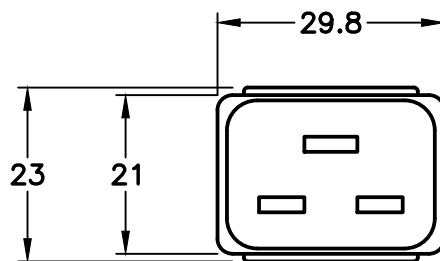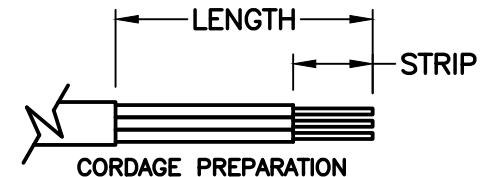

FRONT VIEW

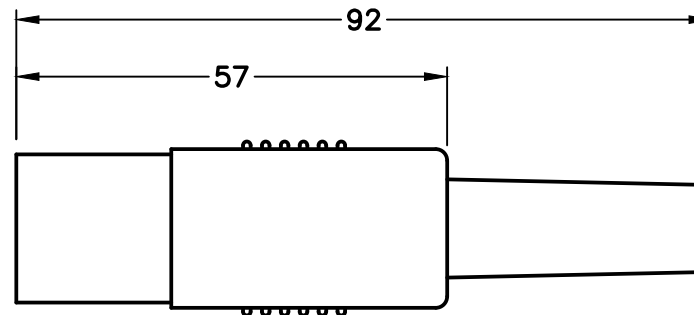

SIDE VIEW