


GX16-2/3/4/5/6/7/8 AVIATION PLUG MALE AND FEMALE PIN CONNECTOR CIRCULAR CONNECTORS SOCKET PLUG DIAMETER 16MM MINI METAL ROUND SHELL CONNECTOR

GX Aviation Connector was first applied to aerospace area for vibration and harsh environment. With technological innovation and costs continuing to fall, it has started to be used in civilian areas, such as CCTV security system, rear view camera, vision system, communications, etc.

DIMENSIONS

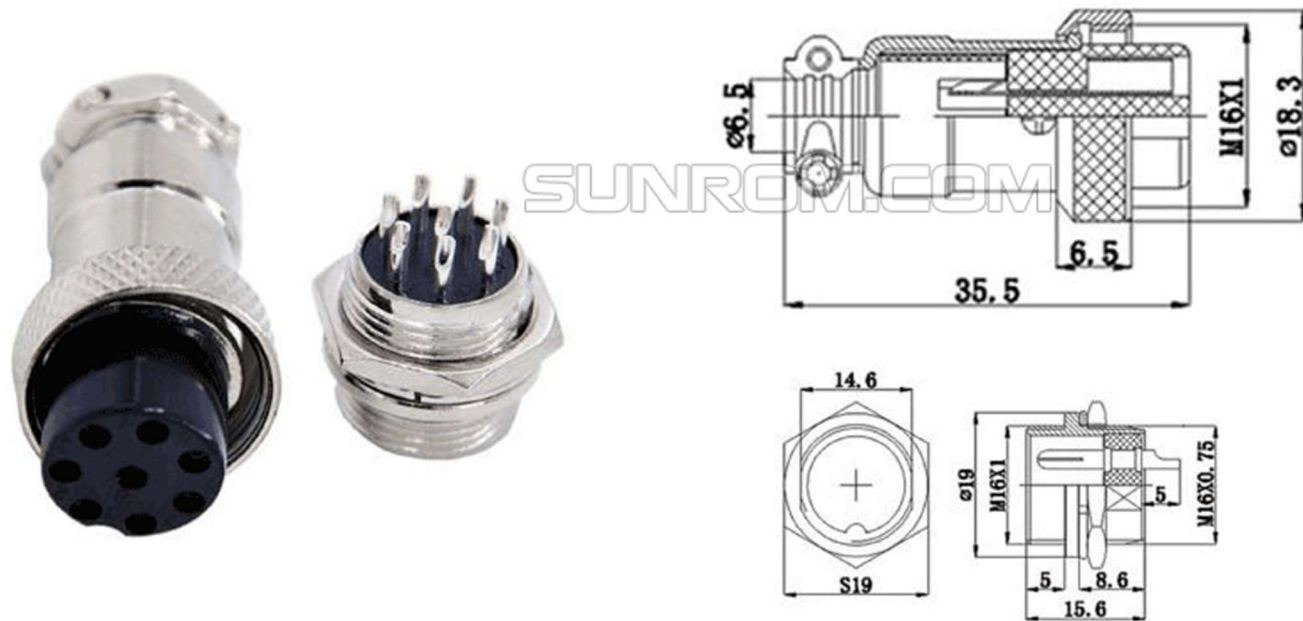

SPECIFICATIONS

Coupling	Threaded Coupling		Termination	Solder			
Shell Material	Zinc Alloy with Nickel plated		Mating Cycle	500 Times			
Insert Material	Bakelite		Temperature Range	-20°C ~ +85°C			
Contact Material	Copper		Cable Diameter	Φ7.5mm- ≤ Φ8.5mm			
			Protection Degree	IP55			
Core Number	2 Core	3 Core	4 Core	5 Core	6 Core	7 Core	8 Core
Contact Arrangement							
Contact The Diameter,Number	φ2.5*2	φ2.5*3	φ2.5*4	φ2.5*5	φ2.5*6	φ2.5*7	φ2.5*8
Rated Current(A)	7	7	5	5	4	4	4
Working Voltage (AC,V,RMS)	250	250	250	250	250	250	250

ORDERING DETAILS

Sunrom Part#	Pins	Ordering Page
5594	2	http://www.sunrom.com/m/5594
5595	3	http://www.sunrom.com/m/5595
5596	4	http://www.sunrom.com/m/5596
5597	5	http://www.sunrom.com/m/5597
5598	6	http://www.sunrom.com/m/5598
5599	7	http://www.sunrom.com/m/5599
5600	8	http://www.sunrom.com/m/5600